


# BRIDE UNIVERSELLE

**PN 10 / 16**


| No. | Référence    | Matériel           | Standard    |
|-----|--------------|--------------------|-------------|
| 1   | Manchette    | Fonte GGG450-10    | EN1563      |
| 2   | Contre bride | Fonte GGG450-10    | EN1563      |
| 3   | Boulonnerie  | Acier 8.8 Dacromet | ISO 898 - 1 |
| 4   | Joint        | EPDM/NBR           | EN681 - 1   |

-Revêtement époxy 250µm

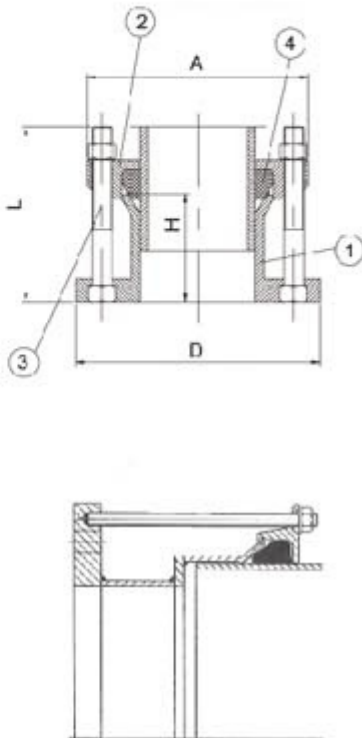

| DN    | Tolérance | PN      | Boulons   |    | A   | D    | H   | Poid | Tuyau |    |    |    |     |    |
|-------|-----------|---------|-----------|----|-----|------|-----|------|-------|----|----|----|-----|----|
|       |           |         | Flange    | L  |     |      |     |      | No.   | mm | mm | mm | kgs | DI |
| DN40  | 48-60     | PN10/16 | M12 x 130 | 2  | 150 | 150  | 80  | 2.8  | ★     | ▲  |    |    |     | +  |
| DN50  | 59-72     | PN10/16 | M12 x 130 | 2  | 156 | 165  | 80  | 3.0  | ★     | ▲  | ◆  | ○  |     | +  |
| DN65  | 72-85     | PN10/16 | M12 x 130 | 2  | 174 | 190  | 80  | 3.9  | ★     | ▲  | ◆  | ○  |     | +  |
| DN80  | 88-103    | PN10/16 | M12 x 130 | 4  | 185 | 200  | 80  | 4.8  | ●     | ★  | ▲  | ◆  | ○   | +  |
| DN100 | 96-116    | PN10/16 | M12 x 130 | 4  | 205 | 220  | 80  | 5.0  | ●     | ★  | ▲  | ◆  |     |    |
| DN100 | 108-120   | PN10/16 | M12 x 130 | 4  | 210 | 220  | 80  | 5.3  | ●     | ★  | ▲  |    |     |    |
| DN100 | 105-125   | PN10/16 | M12 x 130 | 4  | 210 | 220  | 80  | 5.3  | ●     | ★  | ▲  | ◆  | ○   |    |
| DN100 | 109-128   | PN10/16 | M12 x 130 | 4  | 218 | 220  | 80  | 5.5  | ●     | ★  |    | ◆  | ○   | +  |
| DN125 | 132-146   | PN10/16 | M12 x 140 | 4  | 240 | 250  | 80  | 6.5  | ★     |    |    |    |     | +  |
| DN125 | 138-153   | PN10/16 | M12 x 140 | 4  | 246 | 250  | 80  | 6.6  | ★     | ▲  |    |    | ○   | +  |
| DN150 | 158-172   | PN10/16 | M12 x 140 | 4  | 275 | 285  | 80  | 7.5  | ●     | ★  | ▲  |    |     |    |
| DN150 | 155-175   | PN10/16 | M12 x 140 | 4  | 275 | 285  | 80  | 7.5  | ●     | ★  | ▲  |    |     |    |
| DN150 | 159-182   | PN10/16 | M12 x 140 | 4  | 280 | 285  | 80  | 7.6  | ●     | ★  | ▲  | ◆  | ○   | +  |
| DN175 | 192-210   | PN10/16 | M12 x 140 | 4  | 312 | 340  | 80  | 11.0 | ★     | ▲  |    |    |     |    |
| DN200 | 192-210   | PN10/16 | M12 x 140 | 4  | 312 | 340  | 80  | 11.2 | ★     | ▲  |    |    |     |    |
| DN200 | 198-225   | PN10/16 | M12 x 140 | 4  | 320 | 340  | 80  | 12.0 | ●     | ★  | ▲  |    | ○   | +  |
| DN200 | 218-235   | PN10/16 | M12 x 140 | 4  | 328 | 340  | 80  | 10.6 | ●     | ★  | ▲  | ◆  | ○   | +  |
| DN250 | 242-262   | PN10/16 | M12 x 140 | 6  | 360 | 400  | 85  | 14.0 | ★     | ▲  | ◆  | ○  |     |    |
| DN250 | 250-267   | PN10/16 | M12 x 140 | 6  | 368 | 400  | 85  | 14.5 |       | ▲  | ◆  | ○  |     |    |
| DN250 | 250-274   | PN10/16 | M12 x 150 | 6  | 370 | 400  | 85  | 14.8 | ●     | ★  | ▲  | ◆  | ○   | +  |
| DN250 | 272-289   | PN10/16 | M12 x 150 | 6  | 382 | 400  | 85  | 14.9 | ●     | ★  | ▲  | ◆  | ○   | +  |
| DN300 | 315-332   | PN10/16 | M12 x 150 | 6  | 430 | 455  | 85  | 17.9 | ●     | ★  | ▲  |    |     | +  |
| DN300 | 322-339   | PN10/16 | M12 x 150 | 6  | 435 | 455  | 85  | 17.0 | ●     | ★  |    | ◆  | ○   | +  |
| DN300 | 340-360   | PN16    | -M12 x170 | 6  | 455 | 455  | 85  | 35.0 | ★     | ▲  | ◆  | ○  |     |    |
| DN350 | 340-360   | PN10/16 | M14 x 190 | 8  | 455 | 520  | 115 | 28.0 | ★     | ▲  | ◆  | ○  |     |    |
| DN350 | 351-378   | PN10/16 | M14 x 170 | 8  | 510 | 520  | 108 | 28.0 | ●     | ★  | ▲  | ◆  |     | +  |
| DN350 | 374-391   | PN10/16 | M14 x 180 | 8  | 520 | 520  | 108 | 30.4 | ●     | ★  | ▲  | ◆  |     |    |
| DN400 | 390-410   | PN10/16 | M14 x 150 | 8  | 530 | 580  | 108 | 33.5 | ★     | ▲  | ◆  |    |     |    |
| DN400 | 398-430   | PN10/16 | M14 x 210 | 8  | 560 | 580  | 108 | 34.0 | ●     | ★  | ▲  | ◆  | ○   | +  |
| DN400 | 417-437   | PN10/16 | M14 x 180 | 8  | 555 | 580  | 108 | 35.0 | ●     |    |    | ◆  | ○   | +  |
| DN400 | 425-442   | PN10/16 | M14 x 180 | 8  | 560 | 580  | 108 | 34.1 | ●     |    |    |    | ○   | +  |
| DN400 | 450-463   | PN16    | -M14 x180 | 8  | 585 | 580  | 108 | 40.0 | ★     | ▲  | ◆  | ○  |     |    |
| DN450 | 455-475   | PN10/16 | M14 x 180 | 10 | 600 | 640  | 108 | 32.0 | ★     |    | ◆  |    |     |    |
| DN450 | 476-500   | PN10/16 | M14 x 180 | 10 | 620 | 640  | 108 | 34.0 | ●     |    | ▲  | ◆  | ○   |    |
| Dn500 | 500-508   | PN10/16 | M14 x 180 | 10 | 620 | 715  | 114 | 49.5 | ★     | ▲  | ◆  | ○  |     |    |
| Dn500 | 500-533   | PN10/16 | M14 x 210 | 10 | 680 | 715  | 124 | 50.0 | ●     | ★  | ▲  |    |     | +  |
| Dn500 | 526-546   | PN10/16 | M14 x 180 | 10 | 663 | 715  | 114 | 49.0 | ●     |    |    | ◆  | ○   | +  |
| Dn600 | 600-630   | PN10/16 | M14 x 180 | 10 | 725 | 840  | 114 | 60.0 | ★     | ▲  | ◆  | ○  |     |    |
| Dn600 | 608-636   | PN10/16 | M14 x 200 | 10 | 740 | 840  | 130 | 78.2 | ●     | ★  | ▲  |    |     | +  |
| Dn600 | 630-650   | PN10/16 | M14 x 180 | 10 | 745 | 840  | 118 | 66.5 | ●     | ★  | ▲  |    | ○   |    |
| Dn700 | 710-739   | PN10/16 | M16 x 180 | 12 | 875 | 910  | 114 | 72.0 | ●     | ★  | ▲  |    | ○   | +  |
| Dn800 | 816-842   | PN10/16 | M16 x 230 | 12 | 986 | 1025 | 128 | 120  |       |    |    | ◆  | ○   | +  |